



7-inch Multi-function Two-way Intercom Indoor Unit



Two-Way Video
Real-time Interactive
Communication



Inter-household
Communication
Multi-user Remote
Interconnection



Security Alarm
Intelligent Detection



Message Review
Convenient and
Efficient

Product Overview

The WI704 is a multifunctional smart device designed to provide users with a convenient and secure living experience. It supports two-way video calls with the door station or video doorbell and features remote door release, greatly facilitating the user's daily life. The inter-household communication function enables easy communication between households and also supports elevator call functionality, further enhancing user convenience. In terms of security, the indoor unit features fire/security alarm integration and can effectively monitor 8 wired zones, ensuring home safety. The quad-view function allows simultaneous monitoring of four different zones, further enhancing monitoring efficiency and security. Well-suited for residential communities, apartment buildings, and similar locations, assisting residents in achieving efficient and secure daily management.

Application Scenarios



Villa



Apartment



Residential community



Product Features



Enables two-way video communication with the door station or video doorbell and supports remote door access.



Capable of calling the management center for direct communication and sending emergency alarms.



Interconnected for seamless intercom communication, and supports elevator call.



Supports fire/security alarm access functionality (8 wired zones).




LCD high-definition display, capable of monitoring entrance status and remote unlocking.



Supports viewing information such as voice messages, images, and text messages.



Product Appearance/Dimensions

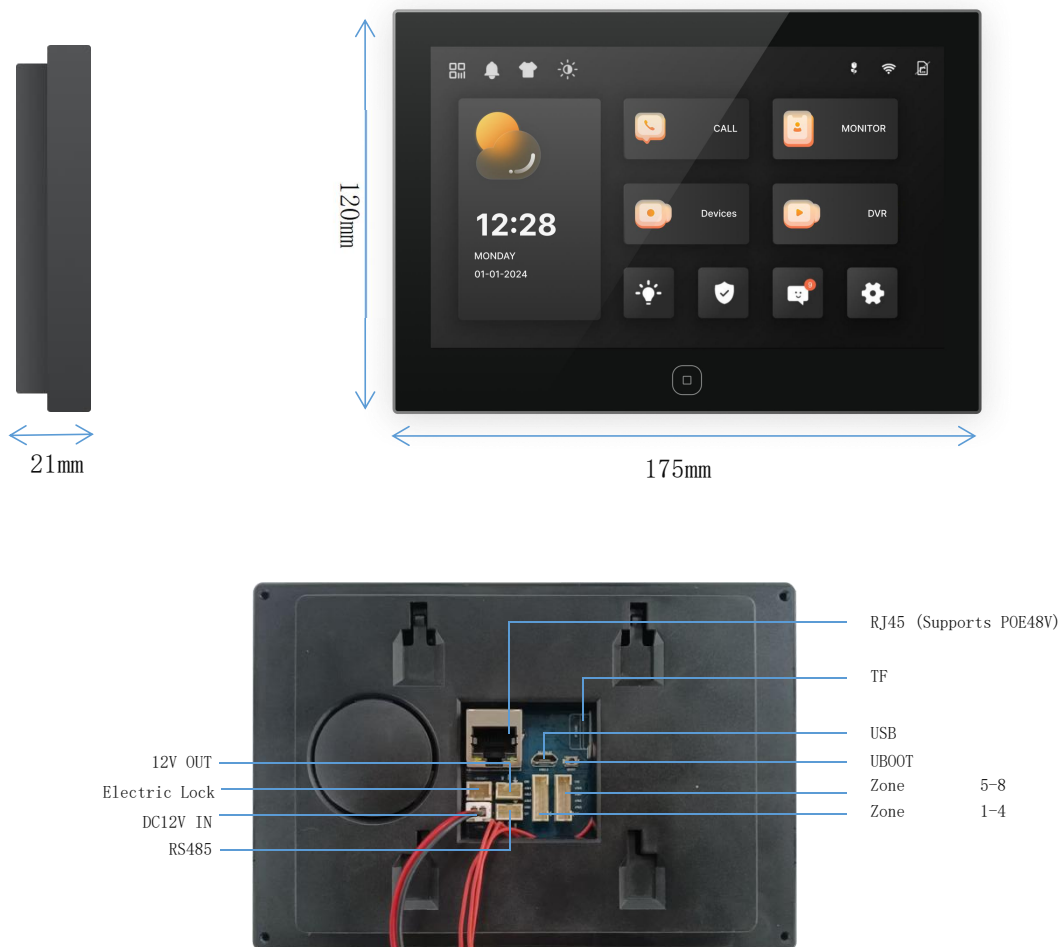

Screen

| | |
|-------------|---|
| Dimensions | 7.0-inch IPS LCD screen |
| Resolution | 1024x600 |
| Touchscreen | High-sensitivity capacitive touchscreen |

Configuration

| | |
|------------------|--|
| CPU | Dual-Core CPU |
| NPU | 1.2 TOPS |
| Operating System | Linux3.10 |
| Storage Capacity | 8GB |
| Network Module | 1GB |
| Operating Memory | RJ45 Standard Interface, 100M Ethernet Interface |

System Functions

| | |
|----------------|---------------------------|
| Video call | Two-way video capable |
| Security Alarm | Supports (8 wired zones) |

Standard Parameters

| | |
|-----------------------------|---------------------------|
| Power Supply | 12V 2A |
| Operating Temperature Range | -10°C-60°C |
| Storage Temperature | -20°C-70°C |
| Power Consumption | 20W (MAX) |
| Installation Method | Wall-Mounted Installation |
| Device Dimensions | 175*120*21mm |